



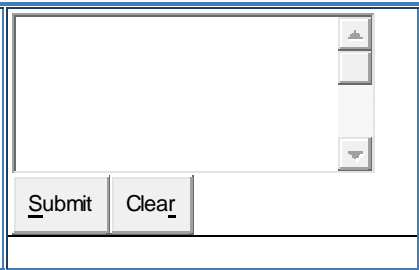
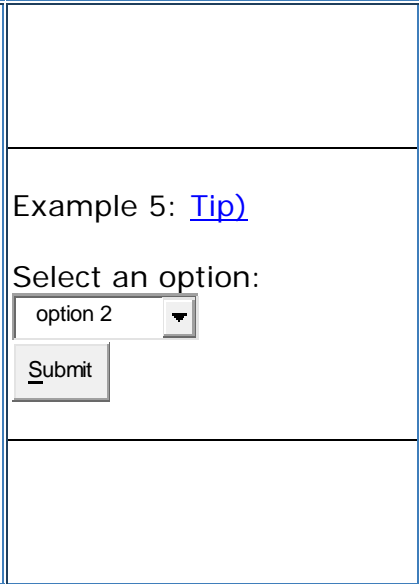
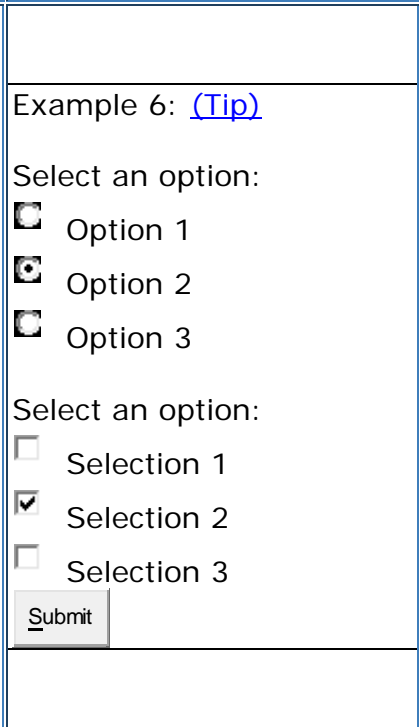



Tag	Name	Code Example	Browser View
<!--	comment	<!--This can be viewed in the HTML part of a document-->	Nothing will show (Tip)
<a -	anchor	Visit Our Site	Visit Our Site (Tip)
	bold	Example	Example
<big>	big (text)	<big>Example</big>	Example (Tip)
<body>	body of HTML document	<body>The content of your HTML page</body>	Contents of your web page (Tip)
 	line break	The contents of your page The contents of your page	The contents of your web page The contents of your web page
<center>	center	<center>This will center your contents</center>	This will center your contents
<dd>	definition description	<dl> <dt>Definition Term</dt> <dd> Definition of the term </dd> <dt>Definition Term</dt> <dd> Definition of the term </dd> </dl>	Definition Term Definition of the term Definition Term Definition of the term
<dl>	definition list	<dl> <dt>Definition Term</dt> <dd>Definition of the term</dd> <dt>Definition Term</dt> <dd>Definition of the term</dd> </dl>	Definition Term Definition of the term Definition Term Definition of the term
<dt>	definition term	<dl> <dt> Definition Term </dt> <dd>Definition of the term</dd> <dt> Definition Term </dt> <dd>Definition of the term</dd> </dl>	Definition Term Definition of the term Definition Term Definition of the term
	emphasis	This is an Example of using the emphasis tag	This is an <i>Example</i> of using the emphasis tag
<embed>	embed object	<embed src="yourfile.mid" width="100%" height="60" align="center">	(Tip)
<embed>	embed object	<embed src="yourfile.mid" autostart="true" hidden="false" loop="false"> <noembed><bgsound src="yourfile.mid" loop="1"></noembed>	Music will begin playing when your page is loaded and will only play one time. A control panel will be displayed to enable

			your visitors to stop the music.
	font	Example	Example (Tip)
	font	Example	Example (Tip)
	font	Example	Example (Tip)
<form>	form	<form action="mailto:you@yourdomain.com"> Name: <input name="Name" value="" size="10"> Email: <input name="Email" value="" size="10"> <center><input type="submit"> </center> </form>	Name: <input type="text"/> (Tip) Email: <input type="text"/> <input type="submit" value="Submit Query"/>
<h1> <h2> <h3> <h4> <h5> <h6>	heading 1 heading 2 heading 3 heading 4 heading 5 heading 6	<h1>Heading 1 Example</h1> <h2>Heading 2 Example</h2> <h3>Heading 3 Example</h3> <h4>Heading 4 Example</h4> <h5>Heading 5 Example</h5> <h6>Heading 6 Example</h6>	Heading 1 Heading 2 Heading 3 Heading 4 Heading 5 Heading 6
<head>	heading of HTML document	<head>Contains elements describing the document</head>	Nothing will show
<hr>	horizontal rule	<hr />	Contents of your web page (Tip) _____
<hr>	horizontal rule	<hr width="50%" size="3" />	Contents of your web page _____
<hr>	horizontal rule	<hr width="50%" size="3" noshade />	Contents of your web page _____
<hr> (Internet Explorer)	horizontal rule	<hr width="75%" color="#ff0000" size="4" />	Contents of your web page _____
<hr> (Internet	horizontal rule	<hr width="25%" color="#6699ff" size="6" />	Contents of your web page _____

Explorer)			Contents of your web page
<html>	hypertext markup language	<pre><html> <head> <meta> <title>Title of your web page</title> </head> <body>HTML web page contents </body> </html></pre>	Contents of your web page
<i>	italic	<i>Example</i>	<i>Example</i>
	image	<pre></pre>	 (Tip)
<input>	input field	<p>Example 1:</p> <pre><form method=post action="/cgi-bin/example.cgi"> <input type="text" size="10" maxlength="30"> <input type="Submit" value="Submit"> </form></pre>	<p>Example 1: (Tip)</p> 
<input> (Internet Explorer)	input field	<p>Example 2:</p> <pre><form method=post action="/cgi-bin/example.cgi"> <input type="text" style="color: #ffffff; font-family: Verdana; font-weight: bold; font-size: 12px; background-color: #72a4d2;" size="10" maxlength="30"> <input type="Submit" value="Submit"> </form></pre>	<p>Example 2: (Tip)</p> 
<input>	input field	<p>Example 3:</p> <pre><form method=post action="/cgi-bin/example.cgi"> <table border="0" cellspacing="0" cellpadding="2"><tr><td bgcolor="#8463ff"><input type="text" size="10" maxlength="30"></td><td bgcolor="#8463ff" valign="Middle"><input type="image" name="submit" src="yourimage.gif"></td></tr></table> </form></pre>	<p>Example 3: (Tip)</p> 
<input>	input field	<p>Example 4:</p> <pre><form method=post action="/cgi-</pre>	<p>Example 4: (Tip)</p>

		<pre>bin/example.cgi" > Enter Your Comments:
 <textarea wrap="virtual" name="Comments" rows=3 cols=20 maxlength=100></textarea>
 <input type="Submit" value="Submit"> <input type="Reset" value="Clear"> </form></pre>	
<input>	input field	<p>Example 5:</p> <pre><form method=post action="/cgi- bin/example.cgi"> <center> Select an option: <select> <option >option 1</option> <option selected>option 2</option> <option>option 3</option> <option>option 4</option> <option>option 5</option> <option>option 6</option> </select>
 <input type="Submit" value="Submit"></center> </form></pre>	<p>Example 5: (Tip)</p> <p>Select an option:</p> 
<input>	input field	<p>Example 6:</p> <pre><form method=post action="/cgi- bin/example.cgi"> Select an option:
 <input type="radio" name="option"> Option 1 <input type="radio" name="option" checked> Option 2 <input type="radio" name="option"> Option 3

 Select an option:
 <input type="checkbox" name="selection"> Selection 1 <input type="checkbox" name="selection" checked> Selection 2 <input type="checkbox" name="selection"> Selection 3 <input type="Submit" value="Submit"> </form></pre>	<p>Example 6: (Tip)</p> <p>Select an option:</p> <p><input type="radio"/> Option 1</p> <p><input checked="" type="radio"/> Option 2</p> <p><input type="radio"/> Option 3</p> <p>Select an option:</p> <p><input type="checkbox"/> Selection 1</p> <p><input checked="" type="checkbox"/> Selection 2</p> <p><input type="checkbox"/> Selection 3</p> 
	list item	<p>Example 1:</p> <pre><menu></pre>	<p>Example 1: (Tip)</p> <ul style="list-style-type: none"> • List item 1

		<pre><li type="disc">List item 1 <li type="circle">List item 2 <li type="square">List item 3 </MENU></pre> <p>Example 2:</p> <pre><ol type="i"> List item 1 List item 2 List item 3 List item 4 </pre>	<ul style="list-style-type: none"> ○ List item 2 ▪ List item 3 <p>Example 2:</p> <ul style="list-style-type: none"> i. List item 1 ii. List item 2 iii. List item 3 iv. List item 4
<link>	link	<pre><head> <link rel="stylesheet" type="text/css" href="style.css" /> </head></pre>	
<marquee> (Internet Explorer)	scrolling text	<pre><marquee bgcolor="#cccccc" loop="-1" scrollamount="2" width="100%">Example Marquee</marquee></pre>	 <p>(Tip)</p>
<menu>	menu	<pre><menu> <li type="disc">List item 1 <li type="circle">List item 2 <li type="square">List item 3 </menu></pre>	<ul style="list-style-type: none"> • List item 1 ○ List item 2 ▪ List item 3
<meta>	meta	<pre><meta name="Description" content="Description of your site"> <meta name="keywords" content="keywords describing your site"></pre>	Nothing will show (Tip)
<meta>	meta	<pre><meta HTTP-EQUIV="Refresh" CONTENT="4;URL=http://www.yourdomain.com/"></pre>	Nothing will show (Tip)
<meta>	meta	<pre><meta http-equiv="Pragma" content="no-cache"></pre>	Nothing will show (Tip)
<meta>	meta	<pre><meta name="rating" content="General"></pre>	Nothing will show (Tip)
<meta>	meta	<pre><meta name="robots" content="all"></pre>	Nothing will show (Tip)
<meta>	meta	<pre><meta name="robots" content="noindex,follow"></pre>	Nothing will show (Tip)
	ordered list	<p>Numbered</p> <pre> List item 1 List item 2 List item 3</pre>	<p>Numbered</p> <ol style="list-style-type: none"> 1. List item 1 2. List item 2 3. List item 3

```
<li>List item 4</li>
</ol>
```

Numbered Special Start

```
<ol start="5">
<li>List item 1</li>
<li>List item 2</li>
<li>List item 3</li>
<li>List item 4</li>
</ol>
```

Lowercase Letters

```
<ol type="a">
<li>List item 1</li>
<li>List item 2</li>
<li>List item 3</li>
<li>List item 4</li>
</ol>
```

Capital Letters

```
<ol type="A">
<li>List item 1</li>
<li>List item 2</li>
<li>List item 3</li>
<li>List item 4</li>
</ol>
```

Capital Letters Special Start

```
<ol type="A" start="3">
<li>List item 1</li>
<li>List item 2</li>
<li>List item 3</li>
<li>List item 4</li>
</ol>
```

Lowercase Roman Numerals

```
<ol type="i">
<li>List item 1</li>
<li>List item 2</li>
<li>List item 3</li>
<li>List item 4</li>
</ol>
```

4. List item 4

Numbered Special Start

5. List item 1
6. List item 2
7. List item 3
8. List item 4

Lowercase Letters

a. List item 1
b. List item 2
c. List item 3
d. List item 4

Capital Letters

A. List item 1
B. List item 2
C. List item 3
D. List item 4

Capital Letters Special Start

C. List item 1
D. List item 2
E. List item 3
F. List item 4

Lowercase Roman Numerals

i. List item 1
ii. List item 2
iii. List item 3
iv. List item 4

Capital Roman Numerals

I. List item 1
II. List item 2
III. List item 3
IV. List item 4

		<p>Capital Roman Numerals</p> <pre><ol type="I"> List item 1 List item 2 List item 3 List item 4 </pre> <p>Capital Roman Numerals Special Start</p> <pre><ol type="I" start="7"> List item 1 List item 2 List item 3 List item 4 </pre>	<p>Capital Roman Numerals Special Start</p> <p>VII. List item 1 III. List item 2 IX. List item 3 X. List item 4</p>
<option>	listbox option	<pre><form method=post action="/cgi-bin/example.cgi"> <center> Select an option: <select> <option>option 1</option> <option selected>option 2</option> <option>option 3</option> <option>option 4</option> <option>option 5</option> <option>option 6</option> </select>
 </center> </form></pre>	<p>Select an option: Tip)</p> <div style="border: 1px solid gray; padding: 2px; display: inline-block;">option 2 ▾</div>
<p>	paragraph	<p>This is an example displaying the use of the paragraph tag. <p> This will create a line break and a space between lines.</p> <p>Attributes:</p> <p>Example 1:

 <p align="left"> This is an example
 displaying the use
 of the paragraph tag.

 Example 2:
</p>	<p>This is an example displaying the use of the paragraph tag.</p> <p>This will create a line break and a space between lines.</p> <p>Attributes:</p> <p>Example 1:</p> <p>This is an example displaying the use</p>

		<pre>
 <p align="right"> This is an example
 displaying the use
 of the paragraph tag.

 Example 3:

 <p align="center"> This is an example
 displaying the use
 of the paragraph tag.</pre>	<p>of the paragraph tag.</p> <p>Example 2:</p> <p>This is an example displaying the use of the paragraph tag.</p> <p>Example 3:</p> <p>This is an example displaying the use of the paragraph tag.</p>								
<code><small></code>	small (text)	<code><small>Example</small></code>	Example (Tip)								
<code><strike></code>	deleted text	<code><strike>Example</strike></code>	Example								
<code></code>	strong emphasis	<code>Example</code>	Example								
<code><table></code>	table	<p>Example 1:</p> <pre><table border="4" cellpadding="2" cellspacing="2" width="100%"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table></pre> <p>Example 2: (Internet Explorer)</p> <pre><table border="2" bordercolor="#336699" cellpadding="2" cellspacing="2" width="100%"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table></pre> <p>Example 3:</p> <pre><table cellpadding="2" cellspacing="2" width="100%"> <tr> <td bgcolor="#cccccc">Column 1</td> <td bgcolor="#cccccc">Column 2</td></pre>	<p>Example 1: (Tip)</p> <table border="1"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table> <p>Example 2: (Tip)</p> <table border="2"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table> <p>Example 3: (Tip)</p> <table> <tr> <td>Column 1</td> <td>Column 2</td> </tr> <tr> <td>Row 2</td> <td>Row 2</td> </tr> </table>	Column 1	Column 2	Column 1	Column 2	Column 1	Column 2	Row 2	Row 2
Column 1	Column 2										
Column 1	Column 2										
Column 1	Column 2										
Row 2	Row 2										

		<pre> </tr> <tr> <td>Row 2</td> <td>Row 2</td> </tr> </table> </pre>													
<td>	table data	<pre> <table border="2" cellpadding="2" cellspacing="2" width="100%"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table> </pre>	<table border="1"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table>	Column 1	Column 2										
Column 1	Column 2														
<th>	table header	<pre> <div align="center"> <table> <tr> <th>Column 1</th> <th>Column 2</th> <th>Column 3</th> </tr> <tr> <td>Row 2</td> <td>Row 2</td> <td>Row 2</td> </tr> <tr> <td>Row 3</td> <td>Row 3</td> <td>Row 3</td> </tr> <tr> <td>Row 4</td> <td>Row 4</td> <td>Row 4</td> </tr> </table> </div> </pre>	<table> <thead> <tr> <th>Column 1</th> <th>Column 2</th> <th>Column 3</th> </tr> </thead> <tbody> <tr> <td>Row 2</td> <td>Row 2</td> <td>Row 2</td> </tr> <tr> <td>Row 3</td> <td>Row 3</td> <td>Row 3</td> </tr> <tr> <td>Row 4</td> <td>Row 4</td> <td>Row 4</td> </tr> </tbody> </table>	Column 1	Column 2	Column 3	Row 2	Row 2	Row 2	Row 3	Row 3	Row 3	Row 4	Row 4	Row 4
Column 1	Column 2	Column 3													
Row 2	Row 2	Row 2													
Row 3	Row 3	Row 3													
Row 4	Row 4	Row 4													
<title>	document title	<pre> <title>Title of your HTML page</title> </pre>	Title of your web page will be viewable in the title bar. (Tip)												
<tr>	table row	<pre> <table border="2" cellpadding="2" cellspacing="2" width="100%"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </pre>	<table border="1"> <tr> <td>Column 1</td> <td>Column 2</td> </tr> </table>	Column 1	Column 2										
Column 1	Column 2														

		</table>	
<tt>	teletype	<tt>Example</tt>	Example
<u>	underline	<u>Example</u>	<u>Example</u>
	unordered list	<p>Example 1:

 List item 1 List item 2
</p> <p>Example 2:
 <ul type="disc"> List item 1 List item 2 <ul type="circle"> List item 3 List item 4 </p>	<p>Example 1:</p> <ul style="list-style-type: none"> • List item 1 • List item 2 <p>Example 2:</p> <ul style="list-style-type: none"> • List item 1 • List item 2 <ul style="list-style-type: none"> ◦ List item 3 ◦ List item 4